


SV-47D



SYMBOLS



ORDER CODES

SV **10** - **47D** **M** - **A2** - **DL** - **N**

1
2
3
4
5
6

1	Valve Size	08, 10	
2	Model Name	47D	
3	Manual Override	none	without manual override
		M	with manual override
4	Voltage (coil)	A1	115 VAC
		A2	230 VAC
		D1	12 VDC
		D2	24 VDC
5	Connector (coil)	DG	DIN connector type
		DL	wiring type
		DR	Deutsch DT04-2P
6	Material of Seal	N	buna-N
		V	viton


MODEL SPEC.

Model	Cavity	Capacity (l/min)	Max. Pressure (bar)	Installation Torque (Nm)	Operating Temperature	Weight (kg)
SV08-47D	SAE-08-4	11	255	27.2	-35 ~ 100°C (-31 ~ 212°F)	0.74
SV10-47D	SAE-10-4	22		33.9		1.45


PERFORMANCE CURVES

► Typical Pressure Drop

- Port 3 → Port 2
- Port 3 → Port 4
- Port 4 → Port 1
- - - Port 2 or 4 → Port 1

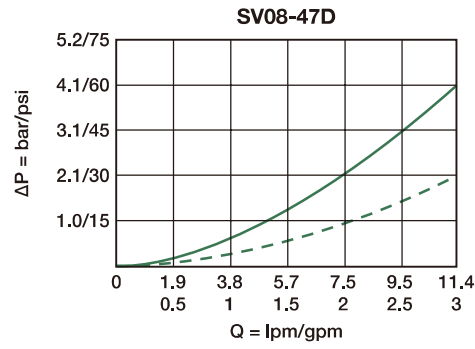


- Port 3 → Port 2 or 4
- Port 4 → Port 1
- - - Port 2 → Port 1

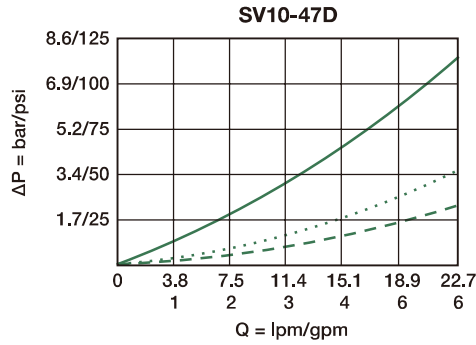

* 32cSt / 150 ssu oil at 40°C

DIMENSION

(UNIT : mm)

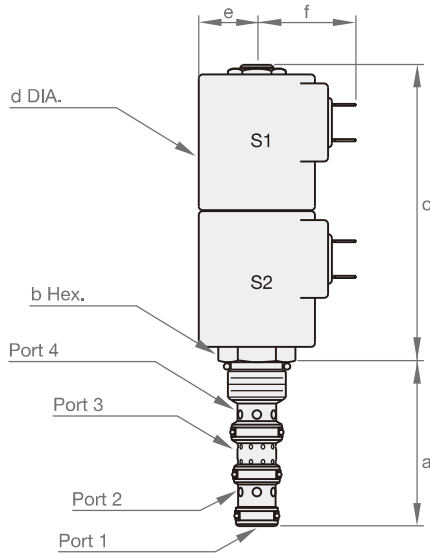

Model	a	b Hex.	c		d DIA.	e	f
			none	M			
SV08-47D	54.80	22.4	85.60		35.8	16.8	34.2
SV10-47D	61.96	25.4	113.00		46.7	21.5	35.8

Steed Machinery Co., Ltd.

No. 28, Ruiguang St., South Dist.,
Taichung City 402006,
Taiwan
Tel : +886-4-2285-4867
Fax : +886-4-2285-2848
Email : info@steedmachinery.com.tw

more information
www.steedmachinery.com.tw

